

TED 中型双侧出风冷风机


TED MEDIUM PROFILE DUAL DISCHARGE AIR COOLER

4.5MM片距 Fin space

Model 型号	Cooling Capacity 换热量(R404a)				Axial fan 外转子风机								Connection 连接			Electrical Defrost 电除霜
	Room Temp.=0°C DT1=8KTD	Room Temp.=+10°C DT1=10KTD	Area 面积	Tube volume 管容	Air Flow 风量	Distance 射程	Fan Speed 风速	Quantity 数量	Diameter 外径	Noise Level 噪音值 in 3M	Voltage 电压	Input Power 输入 功率	Current 电流	Liquid 进	Gas 出	
	KW	KW	m²	Dm³	m³/h	M	RPM	PC	MM	dB(A)	W	A	MM	MM	KW	
TED-041AN	3.69	5.41	16.3	3.4	1720	2x11	1320	1	350	74	220V/50HZ	1*140	1*0.65	12.7	22	3.6
TED-041AL	2.86	3.71	16.3	3.4	1720	2x8	930	1	350	64	220V/50HZ	1*80	1*0.4	12.7	22	3.6
TED-061AN	4.33	6.35	24.5	5.2	1620	2x9	1320	1	350	74	220V/50HZ	1*140	1*0.65	12.7	22	3.7
TED-061AL	2.83	4.02	24.5	5.2	1620	2x5	930	1	350	64	220V/50HZ	1*80	1*0.4	12.7	22	3.7
TED-042AN	7.38	10.80	32.6	6.8	3440	2x12	1320	2	350	77	220V/50HZ	2*140	2*0.65	12.7	28	6.5
TED-042AL	5.32	7.43	32.6	6.8	3440	2x9	930	2	350	67	220V/50HZ	2*80	2*0.4	12.7	28	6.5
TED-062AN	8.66	12.70	49.1	10.4	3240	2x10	1320	2	350	77	220V/50HZ	2*140	2*0.65	12.7	28	6.6
TED-062AL	5.66	8.04	49.1	10.4	3240	2x6	930	2	350	67	220V/50HZ	2*80	2*0.4	12.7	28	6.6
TED-043AN	11.10	16.30	48.9	10.2	5160	2x13	1320	3	350	79	220V/50HZ	3*140	3*0.65	12.7	28	9.4
TED-043AL	7.98	11.10	48.9	10.2	5160	2x10	930	3	350	69	220V/50HZ	3*80	3*0.4	12.7	28	9.4
TED-063AN	12.99	19.05	73.5	15.6	4860	2x11	1320	3	350	79	220V/50HZ	3*140	3*0.65	16	35	9.5
TED-063AL	8.49	12.06	73.5	15.6	4860	2x7	930	3	350	69	220V/50HZ	3*80	3*0.4	16	35	9.5
TED-044AN	14.80	21.70	65.2	13.6	6880	2x14	1320	4	350	80	220V/50HZ	4*140	4*0.65	16	35	12.3
TED-044AL	10.60	14.90	65.2	13.6	6880	2x10	930	4	350	70	220V/50HZ	4*80	4*0.4	16	35	12.3
TED-064AN	17.32	25.40	98.1	20.8	6480	2x12	1320	4	350	80	220V/50HZ	4*140	4*0.65	22	35	12.4
TED-064AL	11.32	16.08	98.1	20.8	6480	2x8	930	4	350	70	220V/50HZ	4*80	4*0.4	22	35	12.4

7MM片距 Fin Space

Model 型号	Cooling Capacity 换热量(R404a)				Axial fan 外转子风机								Connection 连接			Electrical Defrost 电除霜
	Room Temp.=0°C DT1=8KTD	Room Temp.=+10°C DT1=10KTD	Area 面积	Tube volume 管容	Air Flow 风量	Distance 射程	Fan Speed 风速	Quantity 数量	Diameter 外径	Noise Level 噪音值 in 3M	Voltage 电压	Input Power 输入 功率	Current 电流	Liquid 进	Gas 出	
	KW	KW	m²	Dm³	m³/h	M	RPM	PC	MM	dB(A)	W	A	MM	MM	KW	
TED-041BN	2.98	4.37	11	3.4	1850	2x11	1320	1	350	74	220V/50HZ	1*140	1*0.65	12.7	22	3.6
TED-041BL	2.40	3.52	11	3.4	1300	2x8	930	1	350	64	220V/50HZ	1*140	1*0.4	12.7	22	3.6
TED-061BN	3.72	5.46	16.4	5.2	1770	2x9	1320	1	350	74	220V/50HZ	1*140	1*0.65	12.7	22	3.7
TED-061BL	2.74	4.02	16.4	5.2	1140	2x5	930	1	350	64	220V/50HZ	1*140	1*0.4	12.7	22	3.7
TED-042BN	5.96	8.75	22	6.8	3700	2x12	1320	2	350	77	220V/50HZ	2*140	2*0.65	12.7	28	6.5
TED-042BL	4.80	7.04	22	6.8	2600	2x9	930	2	350	67	220V/50HZ	2*140	2*0.4	12.7	28	6.5
TED-062BN	7.44	10.90	32.8	10.4	3540	2x10	1320	2	350	77	220V/50HZ	2*140	2*0.65	12.7	28	6.6
TED-062BL	5.48	8.04	32.8	10.4	2280	2x6	930	2	350	67	220V/50HZ	2*140	2*0.4	12.7	28	6.6
TED-043BN	8.94	13.10	33	10.2	5550	2x13	1320	3	350	79	220V/50HZ	3*140	3*0.65	12.7	28	9.4
TED-043BL	7.20	10.60	33	10.2	3900	2x10	930	3	350	69	220V/50HZ	3*140	3*0.4	12.7	28	9.4
TED-063BN	11.20	16.40	49.2	15.6	5310	2x11	1320	3	350	79	220V/50HZ	3*140	3*0.65	16	35	9.5
TED-063BL	8.22	12.10	49.2	15.6	3420	2x7	930	3	350	69	220V/50HZ	3*140	3*0.4	16	35	9.5
TED-044BN	11.90	17.50	44	13.6	7400	2x14	1320	4	350	80	220V/50HZ	4*140	4*0.65	16	35	12.3
TED-044BL	9.60	14.10	44	13.6	5200	2x11	930	4	350	70	220V/50HZ	4*140	4*0.4	16	35	12.3
TED-064BN	14.90	21.80	65.6	20.8	7080	2x12	1320	4	350	80	220V/50HZ	4*140	4*0.65	22	35	12.4
TED-064BL	11.00	16.10	65.6	20.8	4560	2x8	930	4	350	70	220V/50HZ	4*140	4*0.4	22	35	12.4

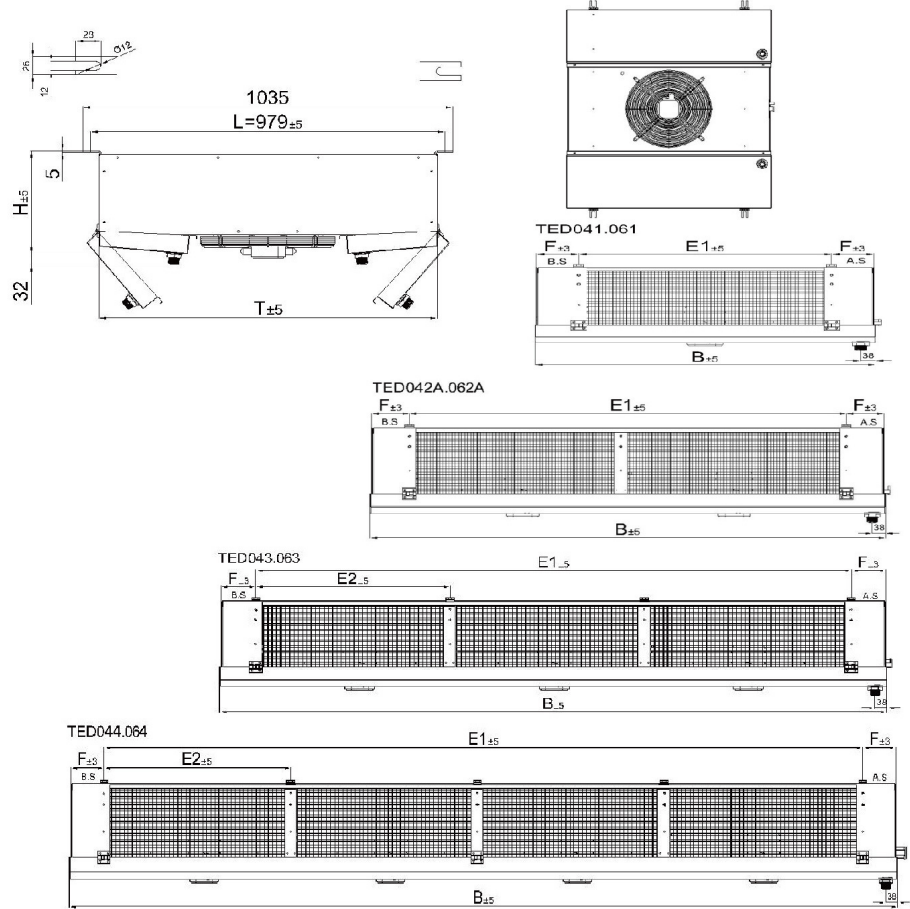

Model	Size (mm)						
	H	B	T	L	E1	E2	F
TED. 041	293	868	946	979	650	-	109
TED. 061	293	868	946	979	650	-	109
TED. 042	293	1478	947	979	1260	-	109
TED. 062	293	1478	947	979	1260	-	109
TED. 043	293	2096	947	979	1870	610	109
TED. 063	293	2096	947	979	1870	610	109
TED. 044	293	7706	947	979	2480	1260	109
TED. 064	293	7706	947	979	2480	1260	109