


EV系列冷风机  
EV SERIES AIR COOLER

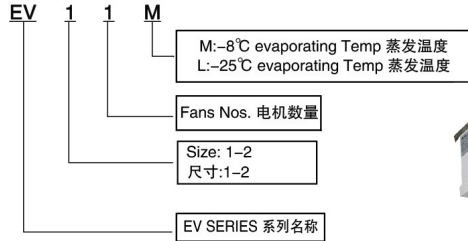


Fin Space: 片距 4.5mm

Model 型号	Capacity 换热量 (W)	Surface (m <sup>2</sup> ) 面积	Airflow 风量 (m <sup>3</sup> /h)	Tube Volume 管容 (dm <sup>3</sup> )	Fan 风机					Connection pipe 连接		Electric defrost heater 加热管 (W)
	R404A EVAP.TEMP -8°C/8KTD				Quantity 数量	Diameter 外径 (mm)	Speed 转速 (r/min)	Input power 输入功率 (W)	Power source 电源	Inlet 进	Outlet 出	
EV11M	490	2.1	700	0.7	1	φ 250	1300	60	220-240V/50HZ	3/8"	3/8"	290
EV21M	620	3.1	700	1.0	1	φ 250	1300	60	220-240V/50HZ	3/8"	3/8"	290
EV12M	1003	4.2	1400	1.3	2	φ 250	1300	120	220-240V/50HZ	1/2"	1/2"	540
EV22M	1280	6.3	1400	1.9	2	φ 250	1300	120	220-240V/50HZ	1/2"	1/2"	540
EV13M	1570	6.4	2100	1.9	3	φ 250	1300	180	220-240V/50HZ	1/2"	5/8"	800
EV23M	1945	9.6	2100	2.9	3	φ 250	1300	180	220-240V/50HZ	1/2"	5/8"	800
EV14M	2105	8.6	2800	2.6	4	φ 250	1300	240	220-240V/50HZ	1/2"	5/8"	1050
EV24M	2580	12.9	2800	3.9	4	φ 250	1300	240	220-240V/50HZ	1/2"	5/8"	1050
EV34M	3066	17.2	2800	5.1	4	φ 250	1300	240	220-240V/50HZ	1/2"	5/8"	1050

Fin Space: 片距 6mm

Model 型号	Capacity 换热量 (W)	Surface (m <sup>2</sup> ) 面积	Airflow 风量 (m <sup>3</sup> /h)	Tube Volume 管容 (dm <sup>3</sup> )	Fan 风机					Connection pipe 连接		Electric defrost heater 加热管 (W)
	R404A EVAP.TEMP -25°C/7KTD				Quantity 数量	Diameter 外径 (mm)	Speed 转速 (r/min)	Input power 输入功率 (W)	Power source 电源	Inlet 进	Outlet 出	
EV11L	360	1.6	700	0.7	1	φ 250	1300	60	220-240V/50HZ	3/8"	3/8"	290
EV21L	485	2.3	700	1.0	1	φ 250	1300	60	220-240V/50HZ	3/8"	3/8"	290
EV12L	760	3.2	1400	1.3	2	φ 250	1300	120	220-240V/50HZ	1/2"	1/2"	540
EV22L	1008	4.8	1400	1.9	2	φ 250	1300	120	220-240V/50HZ	1/2"	1/2"	540
EV13L	1165	4.8	2100	1.9	3	φ 250	1300	180	220-240V/50HZ	1/2"	5/8"	800
EV23L	1535	7.3	2100	2.9	3	φ 250	1300	180	220-240V/50HZ	1/2"	5/8"	800
EV14L	1562	6.5	2800	2.6	4	φ 250	1300	240	220-240V/50HZ	1/2"	5/8"	1050
EV24L	1966	9.7	2800	3.9	4	φ 250	1300	240	220-240V/50HZ	1/2"	5/8"	1050
EV34L	2308	12.9	2800	5.1	4	φ 250	1300	240	220-240V/50HZ	1/2"	5/8"	1050

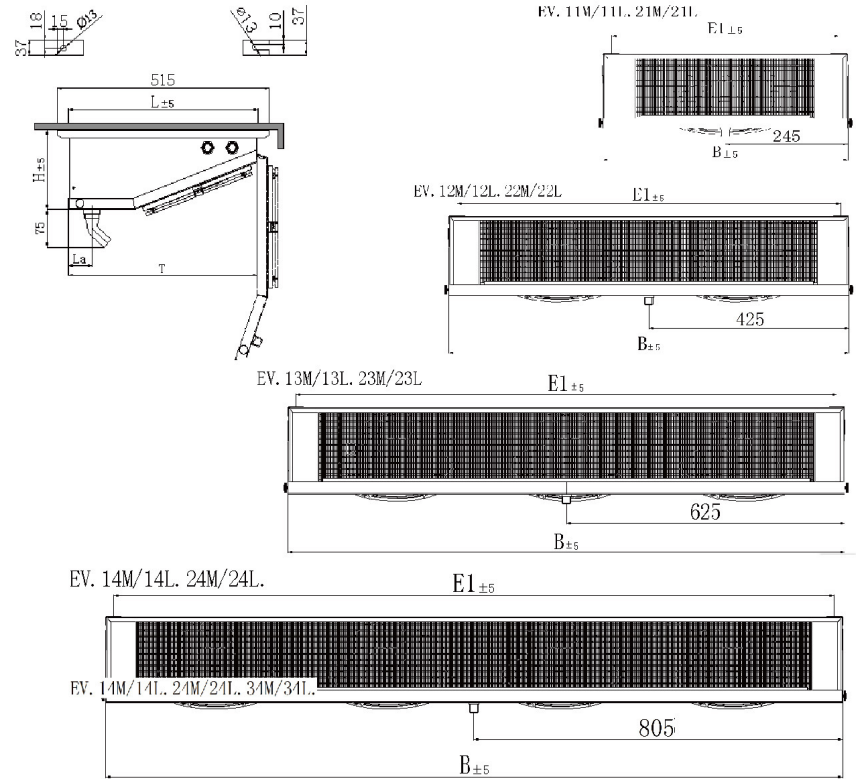

Model 型号	Size 尺寸 (mm)						
	H	B	T	L	E1	La	Drain
EV .11M/11L	182	453	459	480	412	65	3/4"
EV .21M/21L	182	453	459	480	412	88	3/4"
EV .12M/12L	182	853	459	480	812	65	3/4"
EV .22M/22L	182	853	459	480	812	88	3/4"
EV .13M/13L	182	1233	459	480	1192	65	3/4"
EV .23M/23L	182	1233	459	480	1192	88	3/4"
EV .14M/14L	182	1613	459	480	1572	65	3/4"
EV .24M/24L	182	1613	459	480	1572	88	3/4"
EV .34M/34L	232	1613	459	480	1572	88	3/4"