




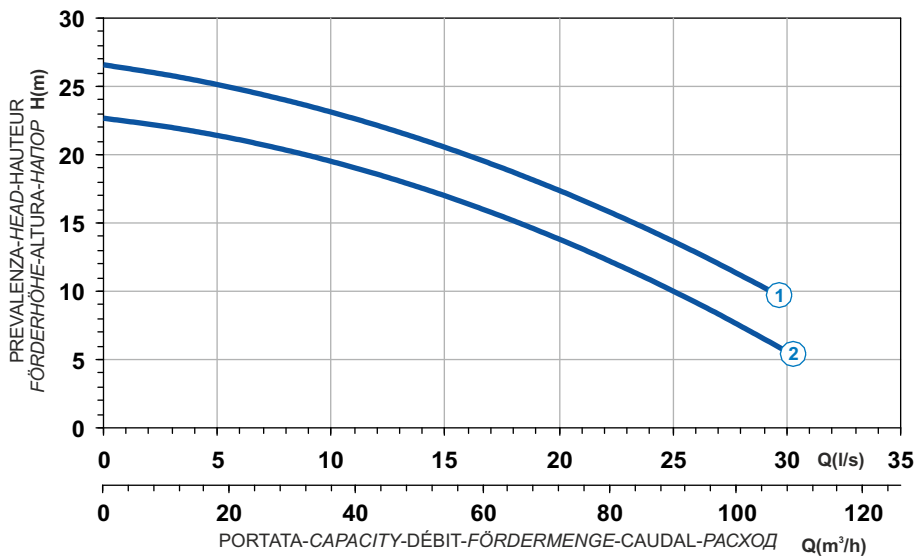

 Ghisa EN-GJL-250  
 Fonte EN-GJL-250  
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250  
 Grauguss EN-GJL-250  
 Чугун EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique**  
**Kennlinie - Curva característica - Характеристическая кривая**



Curve N°	Code	Type	MOTOR			ATEX code 
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7000879	G210R3C1-M30AA2	6	10,9	64,3	7008395
2	7002637	G210R3C2-M30AA2	5	9,1	53,7	7008863

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	30
Discharge (mm)	DN 80
Max Weight (Kg)	75

## Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

