




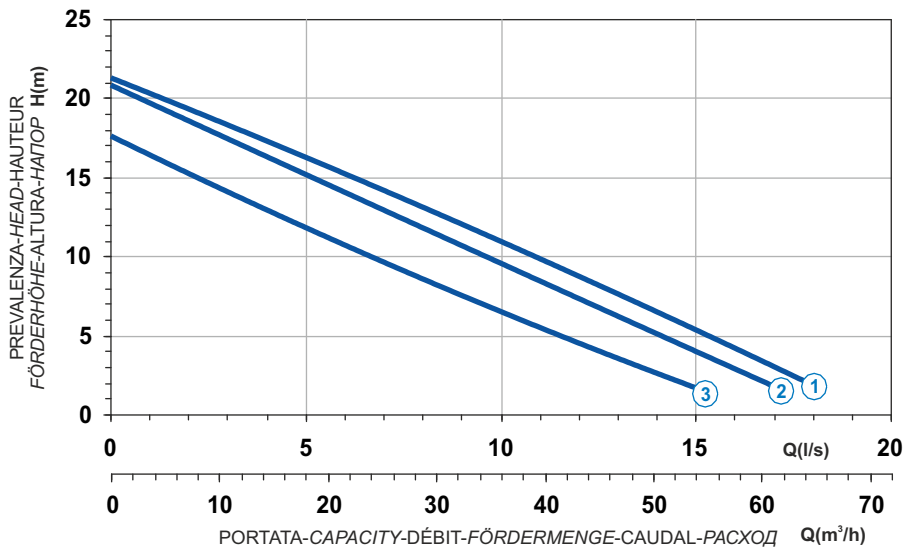

 Ghisa EN-GJL-250  
 Fonte EN-GJL-250  
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250  
 Grauguss EN-GJL-250  
 Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique  
 Kennlinie - Curva característica - Характеристическая кривая



Curve N°	Code	Type	MOTOR			ATEX code 
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7005502	G271T1M4-L40AA0	2,8	5,2	30,7	7005867
2	7005029	G271T1M1-L40AA0	2,4	4,5	26,6	7005558
3	7005453	G271T1M2-L40AA0	2,4	4,5	26,6	7005757

Power supply	3ph 400V 50Hz
R.P.M.	2850
Free passage (mm)	40
Discharge (mm)	DN 65
Max Weight (Kg)	45

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

